




ETF PTC 2k

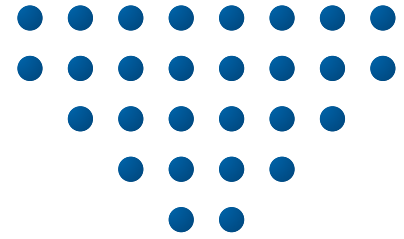

HVAC CONTROLS AND POWER

All-purpose temperature sensors

ETF is a range of temperature sensors designed for use in heating, ventilation and cooling systems, etc.

No one temperature sensor satisfactorily meets all needs. The requirements to be met must therefore be carefully considered.

Is temperature to be measured in a swimming pool complex, for example, or in an aggressive liquid or flue gas?

All major parameters have been taken into consideration in the design of our ETF sensors, including: measured temperature, mechanical load, corrosion, erosion and required response time.

APPLICATIONS

The ETF range consists of a variety of temperature sensors, each specially designed and engineered to suit its own particular purpose:

ETF-195 is suitable for measuring floor temperature.

ETF-395 is suitable for aggressive liquids and gases.

ETF-495 is suitable for liquids and gases.

ETF-595 is a universal sensor suitable for machine parts.

ETF-695 is a surface sensor for pipes and machine parts.

ETF-795 is suitable for measuring outdoor temperature.

ETF-895 is a sensor suitable for non aggressive liquids.

ETF-995-H is a room temperature sensor in OJ design.

ETF-1195 is a multi-purpose sensor with mounting flange.

ETF-1395 is an industrial sensor suitable for liquids, IP54.

ETF-1695 is a surface sensor for piping systems.

ETF-1795 is an outdoor temperature sensor.


















ETF-1895A is a surface temperature sensor.

ETF-2495 is an industrial sensor for liquids and gases, IP54.

ETF-2795 is suitable for outdoor or wet environments, IP54.

ETF-2995 is an industrial sensor for aggressive media.

ETF sensors are designed to provide our customers with an advantageous combination of high quality, accurate measurement and low life cycle costs.

Sensor	Type	Dimensions	Sensor element (PTC 2k Ω @25°C)	Material	Applications
	ETF-195	Ø6.5 mm, L30 mm 2.5 m cable	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Polyolefin Ceramic Stainless AISI 316	Universal sensor e.g. floor sensor
	ETF-395	Ø6.5 mm, L100 mm ¼" pipe, 2.5 m cable Max. pressure 6 atm	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Stainless AISI 316	Aggressive liquids
	ETF-495	Ø6.5 mm, L100 mm ¼" pipe, 2.5 m cable Max. pressure 6 atm	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Galvanized brass	Non-aggressive liquids and media
	ETF-595	Ø6.5 mm, L50 mm 2.5 m cable Max. pressure 0.5 atm	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Galvanized brass	Universal sensor Machine parts
	ETF-695	8x12 mm Hole Ø3.5 mm 2.5 m cable	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Copper	Machine parts Surfaces
	ETF-795	86 x 45 x 35 mm IP54	PTC 2k 25°C = 2000 Ω Range -20°C-+70°C	ABS plastic Melamine	Wet environments Outdoors
	ETF-895	Ø6.5 mm, L200 mm ¼" pipe, 2.5 m cable Max. pressure 6 atm	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Galvanized brass	Non-aggressive liquids and media
	ETF-995-H	80 x 80 x 16 mm IP20	PTC 2k 25°C = 2000 Ω Range -20°C-+70°C	Bayblend noryl	Room sensor Dry rooms Indoors
	ETF-1195	Ø6.5 x 200 mm Flange 2.5 m cable	PTC 2k 25°C = 2000 Ω Range -30°C-+80°C	Galvanized brass	Non-aggressive liquids and gases
	ETF-1395	Ø8 mm, L200 mm, IP54 DIN type B head Max. pressure 6 atm	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Stainless AISI 316	Very high temperatures, machine parts, industry
	ETF-1695	60 x 30 x 30 mm, IP54 Max. pipe diam. 50 mm Incl. clamp	PTC 2k 25°C = 2000 Ω Range -50°C-+70°C	Polycarbonate Stainless AISI 316	Pipe surfaces
	ETF-1795	55 x 52 x 27 mm IP54	PTC 2k 25°C = 2000 Ω Range -40°C-+70°C	Polycarbonate	Wet environments Outdoors Non-aggressive
	ETF-1895	Ø12.0 x 40 mm 2.5 m cable Flat on sensor side	PTC 2k 25°C = 2000 Ω Range -20°C-+70°C	Polycarbonate	Universal sensor for surfaces
	ETF-2495	Ø6.5 mm, L150 mm 45 x 50 x 31 mm PG9, IP54	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Aluminium, Galvanized brass	Industry, machine parts
	ETF-2795	Ø6.5 mm, L20 mm 45 x 50 x 31 mm PG9, IP54	PTC 2k 25°C = 2000 Ω Range -40°C-+70°C	Aluminium, Galvanized brass	Wet environments Outdoors
	ETF-2995	Ø6 mm, L100 mm 2.5 m cable	PTC 2k 25°C = 2000 Ω Range -40°C-+125°C	Stainless AISI 316	Very high temperatures
	ETFL-2	Ø8 mm L100 mm ¼" thread		Galvanized brass	Sensor pocket Non-aggressive

-20°C = 1366 Ω	11°C = 1787 Ω	16°C = 1861 Ω	21°C = 1938 Ω	26°C = 2016 Ω	35°C = 2162 Ω	60°C = 2600 Ω
-10°C = 1494 Ω	12°C = 1802 Ω	17°C = 1876 Ω	22°C = 1954 Ω	27°C = 2032 Ω	40°C = 2246 Ω	70°C = 2788 Ω
0°C = 1629 Ω	13°C = 1817 Ω	18°C = 1892 Ω	23°C = 1968 Ω	28°C = 2048 Ω	45°C = 2331 Ω	80°C = 2985 Ω
5°C = 1699 Ω	14°C = 1831 Ω	19°C = 1907 Ω	24°C = 1984 Ω	29°C = 2064 Ω	50°C = 2419 Ω	90°C = 3188 Ω
10°C = 1771 Ω	15°C = 1846 Ω	20°C = 1922 Ω	25°C = 2000 Ω	30°C = 2080 Ω	55°C = 2509 Ω	100°C = 3400 Ω

CE MARKING

ETF sensors meet the requirements contained in the following directive:

MACHINERY DIRECTIVE

89/392/EEC