# AutomatikCentret

Strandvejen 42 • Saksild • 8300 Odder 86 62 63 64 • <u>www.automatikcentret.dk</u> <u>info@automatikcentret.dk</u>

# HR91 WIRELESS RADIATOR CONTROLLER

# PRODUCT DATA SHEET



# OVERVIEW

Honeywell HR91 is a wireless radiator controller with a modern ergonomically-design and provides features for convenience and energy saving.

The controller use two-way communication based on a frequency of 868MHZ which can be easily integrated in Evohome heating system.

Designed for homeowners that will use their evolome unit or their mobile as the primary way to control and monitor their heating system.

Ideal for small commercial buildings such schools, hotels and offices.

### Peace of Mind

Simple UI and improved RF performance are simplifying the user's day to day life.

Simple check mechanism allows the user to identify the status of the device

Manual basic override ensures that the user can obtain their comfort levels even in an event of signal or unit loss.

#### Mounting


Fast installation due to the simple lock mechanism closing the device at the radiator valve.

#### Energy saving features:

With the auto-window function, the radiator valve is closed when ventilating the room

#### MAIN FEATURES

New minimalistic and attractive design makes the device easy to blend in any interior Simplified check mechanism via LED lights, evohome pop ups and mobile push notifications. Ability to check zone's name via Evohome unit. Fast mounting and taking into operation through simple commissioning. Fits on the most common radiator valves of the type M30x1,5 Anti-theft protection for batteries and device Predefined manual temperature overrides

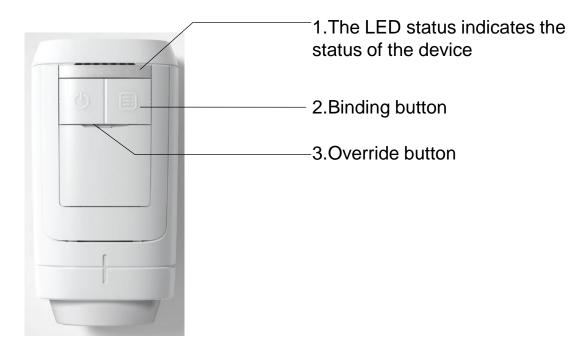

# **SPECIFICATION**

## **ELECTRICAL DATA**

Power supply: Battery

Battery type: 2x ALKALINE 1,5V 2x Lithium 1,5V

## **TEMPERATURE CONTROL**

Internal Sensor Sensor: NTC

## **ENVIRONMENTAL AND STANDARDS**

Environmental temperature: 0...+50 °C

Storage temperature: -20...+55 °C

Humidity: 10...90% relative humidity

# CERTIFICATION

Standards: CE Conformity, RoHS Radio Communications: SRD (868.0...870.0 MHz)

## **MECHANICAL DATA**

Dimension (HxWxD): 89.4mm x 52mm x 52mm Material: PC IP Class: IP 30 Valve connection: M30 x 1.5

# OPTIONS

 HR91 Four Packs
 EAN Code

 HR914
 5025121380942

 HR91 Single Packs
 5025121380935

 HR91
 5025121380935

 HR91 Four Packs
 5025121380713

 HR914EE
 5025121380713

 HR91 Single Packs
 5025121380716

 HR91EE
 5025121380706

Strandvejen 42 • Saksild • 8300 Odder 86 62 63 64 • <u>www.automatikcentret.dk</u> info@automatikcentret.dk