



V2000VS

VS type TRV Body

Pre-settable radiator valve with flush position

APPLICATION

Thermostatic radiator valve bodies (TRV bodies) are fitted on the supply or return of radiators or heat exchangers. Together with a radiator thermostat, for example the Thera-4, they control the room temperature by regulating the flow of hot water into the radiator or heat exchanger. The temperature of different rooms is controlled individually and energy is saved.

TRV bodies of this type have quiet operation and are fitted to the supply of radiators on two-pipe systems with medium flow rates.

The flow rate can be preset according to system requirements.

The valve insert can be replaced while the system is running and without draining using the service tool (see 'Accessories').

TRV bodies of this type are suitable for

- Honeywell Home radiator thermostats with M30 x 1.5 connection
- Certain Honeywell Home MT4 actuators
- Honeywell Hometronic HR80 and Roomtronic HR40 actuators

AT-CONCEPT

AT-Concept valves share the same valve housing design. The valve insert can be replaced by any other AT-Concept valve insert, i.e. BB, KV, UBG, SL, VS, FS, FV and SC.

FEATURES

- Pre-settable fine-adjustment valve disc
- Tamper-proof presetting, visible when radiator thermostat is removed
- For heating systems with medium flow rates
- With extra position for system flushing
- Quiet operation
- DIN type bodies with dimensions according to EN 215, Appendix A, Series D
- NF type bodies with dimensions according to EN 215, Appendix A, Series F
- AT-Concept valve housing and insert
- Valve insert can be replaced while system is operating and without draining the system
- Valve opening spring is not in the water
- Standard M30 x 1.5 thermostat connection



DESIGN

The thermostatic radiator valve body consists of:

- Valve housing PN10, DN10, 15 or 20 with
 - internal thread connection to DIN2999 (ISO7) for threaded, copper or precision steel pipe on inlet (compression ring fittings see 'Accessories')
 - external thread connection with union-nut and radiator tailpiece on outlet (Eurocone for DN15)
 - angle to DIN and straight to DIN bodies with dimensions according to EN215, Appendix A, Series D
 - angle to NF and straight to NF bodies with dimensions according to EN215, Appendix A, Series F
- Pre-settable valve insert with flush position
- Protection cap
- Union-nut and radiator tailpiece

MATERIALS

- Valve housing made of nickel-plated hot-forged brass
- Valve insert made of brass with EPDM O-rings and soft seals, stainless steel spindle and plastic presetting dial
- Protection cap made of beige plastic
- Union-nut and tailpiece made of nickel-plated brass

SPECIFICATIONS

Medium:	Heating water, water quality to VDI2035
Max. operating temperature:	130 °C (262°F)
Operating pressure:	PN10
Max. differential pressure:	200 kPa (2 bar, 29 psi) – 20 kPa (0.2 bar, 2.9 psi) recommended for quiet operation
k_{VS} (C_{VS})-value:	0.75 (0.87)
Nominal flow:	130 kg/h
Body-head connection:	M30 x 1.5
Closing dimension:	11.5 mm
Stroke:	2.5 mm

IDENTIFICATION

- Beige protection cap, 'V' embossed on top of cap
- Beige plastic scale on top of valve insert

FUNCTION

Thermostatic radiator valves enable individual control of room temperature and thus save energy.

The TRV body is controlled by the radiator thermostat. Air from the room passing over the sensor of the radiator thermostat causes the sensor to expand when the temperature rises. The sensor acts onto the valve spindle and this causes the TRV body to close. When the temperature falls the sensor contracts and the spring-loaded valve spindle is opened. The TRV opens in proportion to the temperature of the sensor. Only the amount of water required to maintain the room temperature set on the radiator thermostat can flow into the radiator.

INSTALLATION EXAMPLE

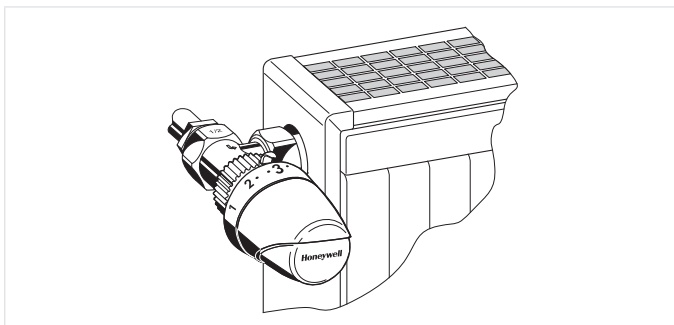


Fig. 1. Angle

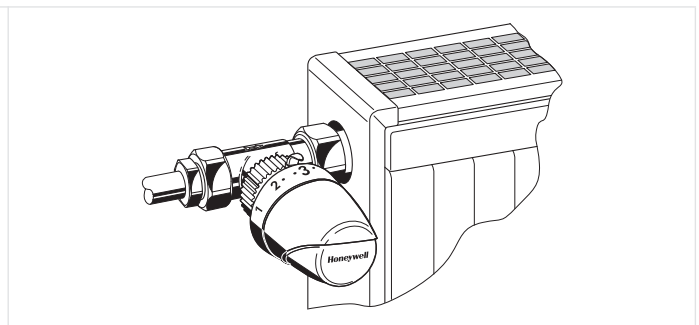


Fig. 2. Straight

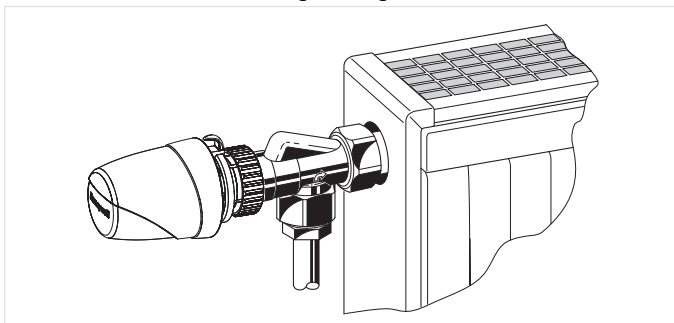


Fig. 3. Horizontal angle

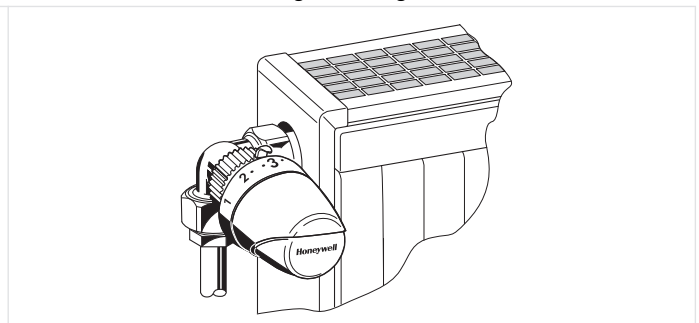


Fig. 4. Corner angle left

PLEASE NOTE:

- To avoid stone deposit and corrosion the composition of the medium should conform with VDI-Guideline 2035
- Additives have to be suitable for EPDM sealings
- System has to be flushed thoroughly before initial operation with all valves fully open
- Any complaints or costs resulting from non-compliance with above rules will not be accepted by Honeywell Home
- Please contact us if you should have any special requirements or needs

DIMENSIONS AND ORDERING INFORMATION




Fig. 5. Angle

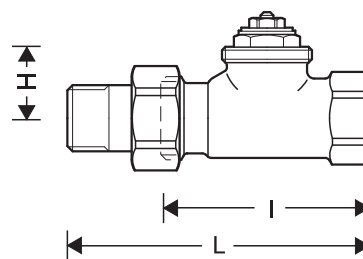


Fig. 6. Straight

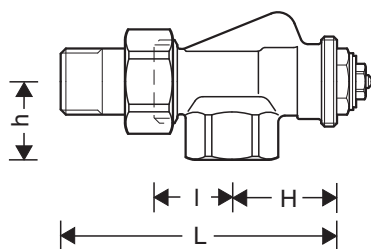


Fig. 7. Horizontal angle

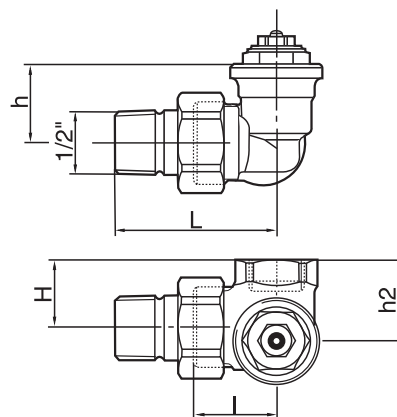


Fig. 8. Corner angle left

Tab. 1 Dimensions and OS-Nos (OS=Ordering System)

Body type	DN	EN 215 certified	$k_{vs}(c_{vs})$ -value	Pipe connection	l	L	h	H	h ₂	OS-No.
For the supply										
Angle to EN 215 (D) (Fig. 5)	10	•	0.75 (0.87)	Rp 3/8"	26	52	22	20	-	V2000EVS10
	15	•	0.75 (0.87)	Rp 1/2"	29	58	26	20	-	V2000EVS15
	20	•	0.75 (0.87)	Rp 3/4"	34	66	29	19	-	V2000EVS20
Straight to EN 215 (D) (Fig. 6)	10	•	0.75 (0.87)	Rp 3/8"	59	85	-	25	-	V2000DVS10
	15	•	0.75 (0.87)	Rp 1/2"	66	95	-	25	-	V2000DVS15
	20	•	0.75 (0.87)	Rp 3/4"	74	106	-	25	-	V2000DVS20
Angle to EN 215 (F) (Fig. 5)	10	•	0.75 (0.87)	Rp 3/8"	24	49	20	21	-	V2020EVS10
	15	•	0.75 (0.87)	Rp 1/2"	26	53	23	22	-	V2020EVS15
	20	•	0.75 (0.87)	Rp 3/4"	34	66	29	18	-	V2020EVS20
Straight to EN 215 (F) (Fig. 6)	10	•	0.75 (0.87)	Rp 3/8"	50	75	-	26	-	V2020DVS10
	15	•	0.75 (0.87)	Rp 1/2"	55	82	-	26	-	V2020DVS15
	20	•	0.75 (0.87)	Rp 3/4"	74	106	-	24	-	V2020DVS20
Horizontal angle (Fig. 7)	10	•	0.75 (0.87)	Rp 3/8"	24	50	22	33	-	V2000AVS10
	15	•	0.75 (0.87)	Rp 1/2"	26	54	26	35	-	V2000AVS15
Corner angle, radiator connection left (Fig. 8)	10	•	0.75 (0.87)	Rp 3/8"	24	53	26	22	26.5	V2000LVS10
	15	•	0.75 (0.87)	Rp 1/2"	24	53	26	26	30.5	V2000LVS15
Corner angle, radiator connection right (Fig. 8)	10	•	0.75 (0.87)	Rp 3/8"	24	53	26	26	26.5	V2000RVS10
	15	•	0.75 (0.87)	Rp 1/2"	24	53	26	26	30.5	V2000RVS15


Note: All dimensions in mm unless stated otherwise.

ACCESSORIES

	Description	Dimension	Part No.
	FIG3/8CS Compression fitting for COPPER and STEEL pipe Consisting of compression nut and compression ring. For valves with internal thread. Note: Support inserts have to be used for copper or soft steel pipe with 1.0 mm wall thickness. Max. operating temperature 120 °C, max. operating pressure 10 bar.		
	3/8", DN10, 1 pcs.	10 mm	FIG3/8CS10
	3/8", DN10, 1 pcs.	12 mm	FIG3/8CS12
	1/2", DN15, 1 pcs.	10 mm	FIG1/2CS10
	1/2", DN15, 1 pcs.	12 mm	FIG1/2CS12
	1/2", DN15, 1 pcs.	14 mm	FIG1/2CS14
	1/2", DN15, 1 pcs.	15 mm	FIG1/2CS15
	1/2", DN15, 10 pcs.	15 mm	FIG1/2CS15-10
	1/2", DN15, 1 pcs.	16 mm	FIG1/2CS16
	3/4", DN20, 1 pcs.	18 mm	FIG3/4CS18
3/4", DN20, 1 pcs.	22 mm	FIG3/4CS22	
	FIG3/8CSS Compression fitting for COPPER and STEEL pipe Consisting of compression nut and compression ring and support insert. For valves with internal thread. Note: Support inserts have to be used for copper or soft steel pipe with 1.0 mm wall thickness. Max. operating temperature 120 °C, max. operating pressure 10 bar.		
	3/8", DN10	12 mm	FIG3/8CSS12
	1/2", DN15	12 mm	FIG1/2CSS12
	1/2", DN15	14 mm	FIG1/2CSS14
	1/2", DN15	15 mm	FIG1/2CSS15
	1/2", DN15	16 mm	FIG1/2CSS16
	1/2", DN15	18 mm	FIG1/2CSS18
	3/4", DN20	18 mm	FIG3/4CSS18
	FIG1/2M Compression fitting for MULTILAYER pipe. Consisting of compression nut, compression ring and support insert. For valves with internal thread. Note: Max. operating temperature 90°C, max. operating pressure 10 bar		
	1/2", DN15	16 mm	FIG1/2M16X2
	VA6290 Reduction piece		
	1" pipe > 1/2" valve		VA6290A260
	1 1/4" pipe > 1/2" valve		VA6290A280
	1" pipe > 3/4" valve		VA6290A285
1 1/4" pipe > 3/4" valve		VA6290A305	
	VA5201Axxx Radiator tailpiece with thread up to collar		
	for valves DN10 (3/8")		VA5201A010
	for valves DN15 (1/2")		VA5201A015
for valves DN20 (3/4")		VA5201A020	
	VA5204Bxxx Extended radiator tailpiece, nickel-plated, to be shortened as required		
	3/8" x 70 mm (for DN10) thread approx. 50 mm		VA5204B010
	1/2" x 76 mm (for DN15) thread approx. 65 mm		VA5204B015
	3/4" x 70 mm (for DN20) thread approx. 60 mm		VA5204B020

	VA2200Dxxx	Manual handwheel cap		
		Presetable, with integrated locking device		VA2200D001
	VA2202Axxx	Pressure cap – for shutting off valves on radiator outlet		
		for valves DN10 (3/8")		VA2202A010
		for valves DN15 (1/2")		VA2202A015
		for valves DN20 (3/4")		VA2202A020
	VA5090	Sealing ring for pressure cap		
		for valves DN10 (3/8")		VA5090A010
		for valves DN15 (1/2")		VA5090A015
		for valves DN20 (3/4")		VA5090A020
	VA8200A	Service tool to replace valve insert		
			for all sizes	VA8200A001
	VA8201	Precision presetting key		
		for all VS and FS type valves		VA8201FV03
	VA8201	Presetting key		
		for all VS, V, FS and FV type valves		VA8201FV02
	VS1200VS	Replacement valve insert		
		VS type		VS1200VS01


FLOW DIAGRAM (BASED ON 2K)

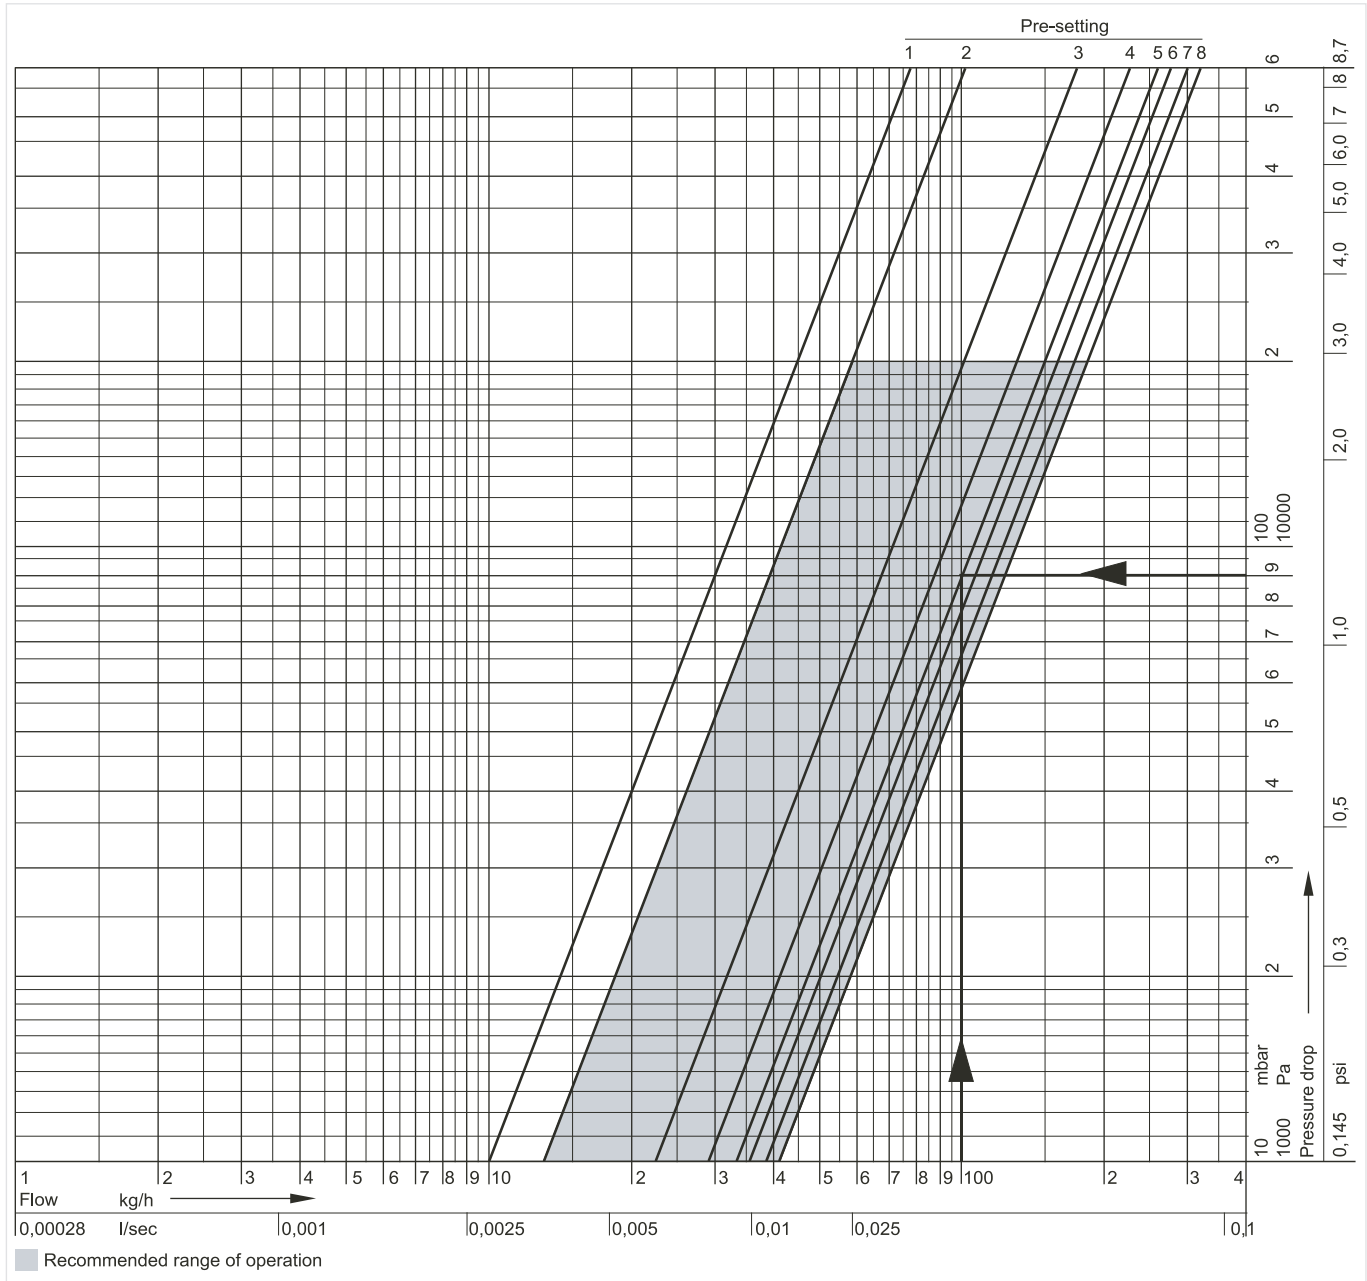

Presetting	1	2	3	4	5	6	7	8
xP = 1K (m ³ /h)	0.10	0.12	0.15	0.17	0.19	0.20	0.20	0.20
xP = 2K (m ³ /h)	0.10	0.13	0.22	0.29	0.33	0.36	0.38	0.41
k _v -value (m ³ /h)	0.10	0.15	0.25	0.35	0.45	0.57	0.65	0.75
c _v -value (m ³ /h)	0.12	0.17	0.29	0.41	0.52	0.66	0.75	0.87

Note: Presetting 8 = flush position, set by factory

Tolerances for Presetting Values

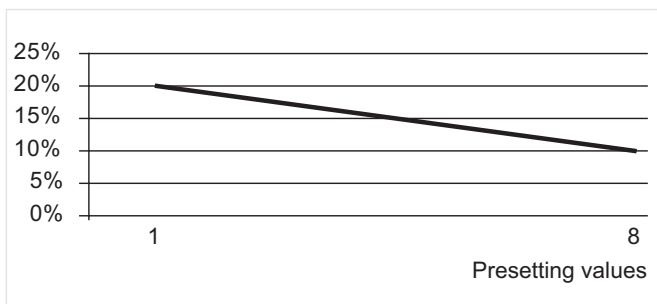

Design example

Given:	Flow rate 100 kg/h
Required:	Presetting for a required pressure loss $\Delta p = 90 \text{ mbar} = 9\,000 \text{ Pa}$ with a P-band of 2 K
Solution:	The required pressure loss is found at the intersection of the flow line with the line for the chosen valve performance P=2K
Result:	Presetting 5

For more information

homecomfort.resideo.com/europe



Ademco 1 GmbH
Hardhofweg 40
74821 MOSBACH
GERMANY
Phone: +49 6261 810
Fax: +49 6261 81309

Manufactured for and on behalf of the
Pittway Sàrl, La Pièce 4, 1180 Rolle, Switzerland
by its Authorised Representative Ademco 1 GmbH
EN0H-2103GE25 R0419
Subject to change
© 2019 Resideo Technologies, Inc.
The Honeywell Home trademark is used under
license from Honeywell International Inc.

 **AutomatikCentret**

Strandvejen 42 • Saksild • 8300 Odder
86 62 63 64 • www.automatikcentret.dk
info@automatikcentret.dk

Honeywell Home