



# V2000SX

## Standard Thermostatic Valve

Presetable thermostatic valve body with standard flow range

### APPLICATION

The V2000SX is a range of thermostatic radiator valves with a wide range of flow rate pre-settings for balancing of heating systems, which makes the V2000SX an almost universal valve for pumped two-pipe heating and cooling systems. The V2000SX valves have a quiet operation in both standard and reverse flow direction. It is recommended to fit them at the supply of a radiator, but fitting the valves at the return of the radiator is also possible.

The V2000SX range covers a wide range of dimensions, patterns and connections, offering a solution for almost all installation situations in new building, renovation and retrofit projects.

### APPROVALS

- Keymark certified and tested to EN 215

### SPECIAL FEATURES


- Wide range of flow rates easily adjustable by a setting key (see 'Accessories')
- Augmented nominal flows with high-stroke thermostatic heads T3019HF and T6001HF
- Maximum flow limited to max. 130 % of nominal flow to prevent misbalance during heating of cooled down rooms
- Quiet operation, including in reversed flow direction
- Strong restoring spring, which is not immersed in water, ensuring durability of the valve
- Double o-ring seal for maintenance-free operation
- Standard dimensions per EN215, complemented with an extended range of patterns and connection threads
- Standard M30 x 1.5 thermostat connection
- Valves can be shut-off with the protection cap
- V2000SX valves are compatible with the following Honeywell Home actuators:
  - All radiator thermostats with M30 x 1.5 connection
  - HR types of Evohome and Roomtronic actuators
  - MT4 actuators
  - M4410E/K and M7410E5001 modulating actuators
- The valve insert can be replaced while the system is operating and without draining using the service tool (see 'Accessories')
- Valve housing and insert fits to Honeywell Home AT-Concept design, ensuring housing and insert cross compatibility with MNG, Honeywell and Honeywell Home thermostatic valves produced by Resideo and its predecessors since 1974



### TECHNICAL DATA

<b>Media</b>	
Medium:	Water or water-glycol mixture, quality to VDI 2035
pH-value:	8 - 9,5
<b>Connections/Sizes</b>	
Body-head connection:	M30 x 1.5
Sizes:	DN10, DN15, DN20
<b>Operating temperatures</b>	
Max. operating temperature:	130 °C
Min. operating temperature medium:	-10 °C non-freezing
<b>Pressure values</b>	
Max. operating pressure:	PN10, 10 bar (1000kPa)
Max. differential pressure:	1.0 bar (100 kPa)
Differential pressure recommended for quiet operation:	≤0.2 bar (20 kPa)
<b>Flow rates</b>	
Nominal flow range:	20 - 170 l/h
Max. nominal flow at 10 kPa (EN 215) – standard head:	170 l/h ± 10 %
Max. nominal flow at 10 kPa (EN 215) – high-stroke head:	210 l/h ± 10 %
<b>Specifications</b>	
Closing dimension:	11.5 mm
Factory setting:	position 6
<b>Identification</b>	
- Ivory colour protection cap with embossed 'SX' on the top	
- Ivory colour plastic dial on the top of valve insert	

## CONSTRUCTION

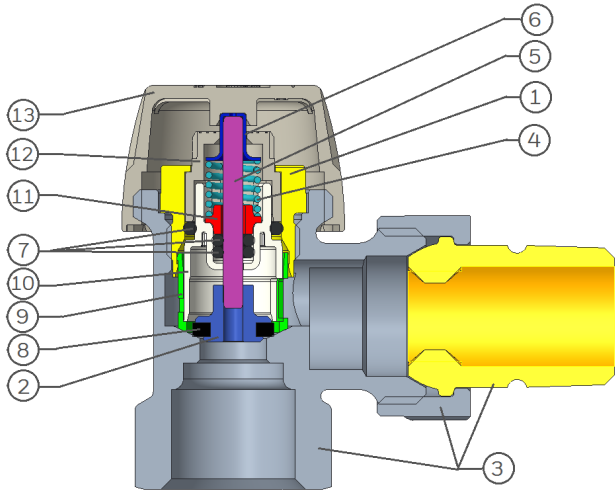Overview	Components	Materials
	<b>1</b> Insert cartridge	
	<b>2</b> Plunger	Brass
	<b>3</b> Valve body, tailpiece, nut	
	<b>4</b> Return spring	
	<b>5</b> Spindle	Stainless steel
	<b>6</b> Spindle cap	
	<b>7</b> O-rings	EPDM 70
	<b>8</b> Plunger seal	
	<b>9</b> Orifice casing	PPS GF40
	<b>10</b> Setting screen	
	<b>11</b> Retaining bushing	PBT GF30
	<b>12</b> Setting dial	
	<b>13</b> Protection cap	PP GF10

### METHOD OF OPERATION

The V2000SX valve is controlled by the radiator thermostat. Air from the room passing over the sensor of the radiator thermostat causes the sensor to expand when the temperature rises. The sensor pushes the valve spindle, closing the valve.

When the temperature falls, the sensor contracts and the spring-loaded valve spindle is opened. The TRV opens in proportion to the temperature of the sensor. Only the amount of water required to maintain the room temperature set on the radiator thermostat can flow into the radiator.

The V2000SX valves have the plunger surrounded by a casing with different orifices and a mating setting screen with one orifice. When the setting dial on top of the valve cartridge is rotated, an orifice in the setting screen aligns with the respective orifice in the casing. Thus, the orifice limiting the maximum flow through the valve is selected.

The stroke/flow characteristic and the size of the orifices is designed to provide for a proportional increase of flow with the stroke, while limiting the maximum flow to not more than 130 % of the nominal flow of the valve. This prevents an oversupply of the controlled radiator and a loss of the system balancing in cases when the radiator setting has been turned high in a cooled down room.

The V2000SX valves are suitable for system design with 1K to 2K p-band control range. In combination with the T3019HF and T6001HF thermostatic heads with high specific stroke, the V2000SX valves are suitable for system design with 0.5K to 2K p-band control range.

### TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	0 °C
Max. ambient temperature:	50 °C
Max. ambient relative humidity:	75 % *

\*non condensing

## INSTALLATION GUIDELINES

- The V2000SX valves are primarily designed for use in pumped 2-pipe heating systems with thermostatic flow control
- It is recommended to install the V2000SX valves on the supply side of a heat exchanger, so that the heating medium flows in the direction indicated by the arrow on the body. However, the V2000SX valves are designed and tested also for a trouble-free operation in the reverse flow direction and installation at the return is hence also possible. This also allows to flip an external threaded angled valve and install it as an axial valve
- Similarly, a double angle valve with external thread can also be flipped from right to left and vice-versa
- It is also recommended to install the V2400 series "Verafix" return valves at the other end of the heat exchanger. The Verafix allows for shut-off and drain-down of the radiator. But it can also be throttled to dissipate excessive differential pressure across a radiator and hence reduce any noise that could otherwise occur
- It is recommended to effectuate valve presetting to achieve hydraulic balancing and improve comfort and energy efficiency, even in smaller systems. Static balancing has been shown to result in up to 5 % of energy savings
- In larger systems with static balancing, it is recommended to install V5032 pipeline balancing valves at the return of each branch or riser
- In large systems, hydraulic balancing with the V2000SX series valves works best in combination with the V5010 Kombi-3 or V5001P Kombi-Auto differential pressure control valves installed on each heating branch or riser. Dynamic balancing compensates for varying temperature setting and heat load conditions, and has been shown to result in up to 10 % of energy savings
- The V2000SX valve bodies can be used with all Honeywell Home thermostatic heads with M30x1.5 connection and with recommended Honeywell Home thermoelectric or motorized actuators (see section Recommended Actuators below). When using actuators from other manufacturers, make sure to select actuators with pressure force not exceeding 100N
- When the design nominal flow exceeds 170l/h, the T3019HF and T6001HF thermostatic heads with high specific stroke, or the HR series electronic heads should be used with the V2000SX valves in order to provide the necessary flow capacity

### Installation Example

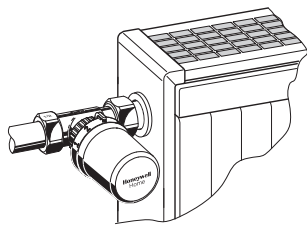


Fig. 1. Straight

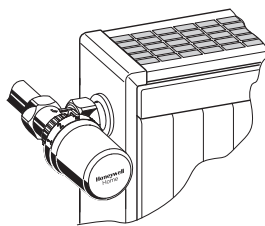


Fig. 2. Angled

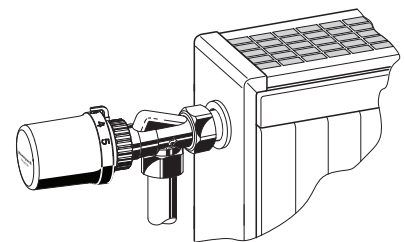


Fig. 3. Axial

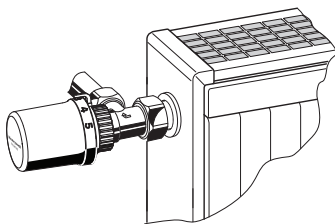


Fig. 4. Angled with external thread installed as axial




Fig. 5. Double angle (corner) left

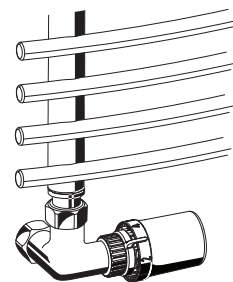


Fig. 6. Double angle (corner) left on a towel radiator

**Setup requirements**


- To avoid stone deposit and corrosion the composition of the medium should conform with VDI-Guideline 2035
- All additives and lubricants used for heating medium treatment have to be suitable for EPDM seals to avoid their disintegration. Use of mineral oils should be avoided
- For industrial and long-distance energy systems please refer to applicable codes VdTÜV and 1466/AGFW FW 510
- Heavy polluted existing heating systems must be flushed thoroughly before replacing thermostatic valves
- The heating system must be fully deaerated
- Any complaints or costs resulting from non-compliance with above rules will not be accepted Resideo and its subsidiaries manufacturing the Honeywell Home products

**Recommended actuators**

- V2000SX flow characteristics are designed for control by thermostatic heads, which provide for proportional regulation within the 2K p-band stroke (0.45 mm). The valves are therefore best controlled by a mechanical or electronic thermostatic head
- All Honeywell Home thermostatic radiator heads with M30x1.5 connection fit the V2000SX valves
- Honeywell Home HR90, HR91 and HR92 electronic TRV heads are suitable for the V2000SX valves
- Honeywell Home MT4 thermoelectric actuators can be used for on/off control of the V2000SX valves
- Thermostatic radiator valves are intentionally designed such that they reach the design flow capacity at 2K p-band stroke (0.45 mm) and the max. flow rate exceeds the nominal flow rate by not more than 30 %. Thus, the modulating actuators used need to be able to provide for precise proportional flow control over a very small stroke range, because at higher strokes, the flow is limited by the presetting
- The M4410E/K and M7410E5001 modulating actuators are recommended


**TECHNICAL CHARACTERISTICS**

**Presetting**

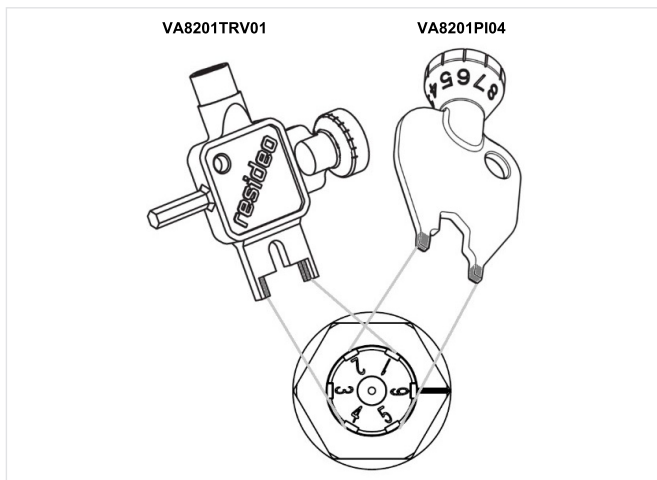

- The flow rates can be adjusted to one of the 6 settings (20 to 170 l/h for standard heads and 20 to 210 l/h for heads with high specific stroke)
- If the required maximum flow does not match exactly the setting value, use the closest higher setting
- The setting is changed using a special setting key
  - Slide the forked part of the setting key into two opposite grooves in the setting dial of the valve
  - Turn the setting key until the desired setting value is against the reference mark on the brass cartridge of the insert
  - The setting dial can be rotated in any direction
  - Do not use intermediate settings
- The default factory setting is position 6

**Flow tolerances**

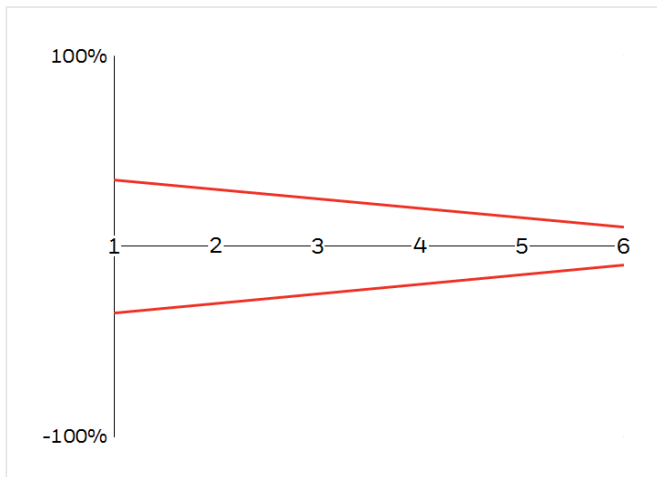


**Design example**

- Heat load:  $Q=1000\text{ W}$
- Supply vs. return temperature difference:  $\Delta T=15\text{ K}$
- Calculated mass flow:  $\dot{m} = Q / (c \times \Delta T) = 1000 / (1.163 \times 15) = 57\text{ l/h}$
- Control within: 2K p-band
- Available differential pressure:  $\Delta p = 100\text{ mbar}$  (10 kPa)
- Valve setting from charts on following pages (use next higher setting): 4


**Flow Rate**

All angled valves, DN15/DN20 straight and DN15 axial valves, with standard heads (0.22mm/K stroke)

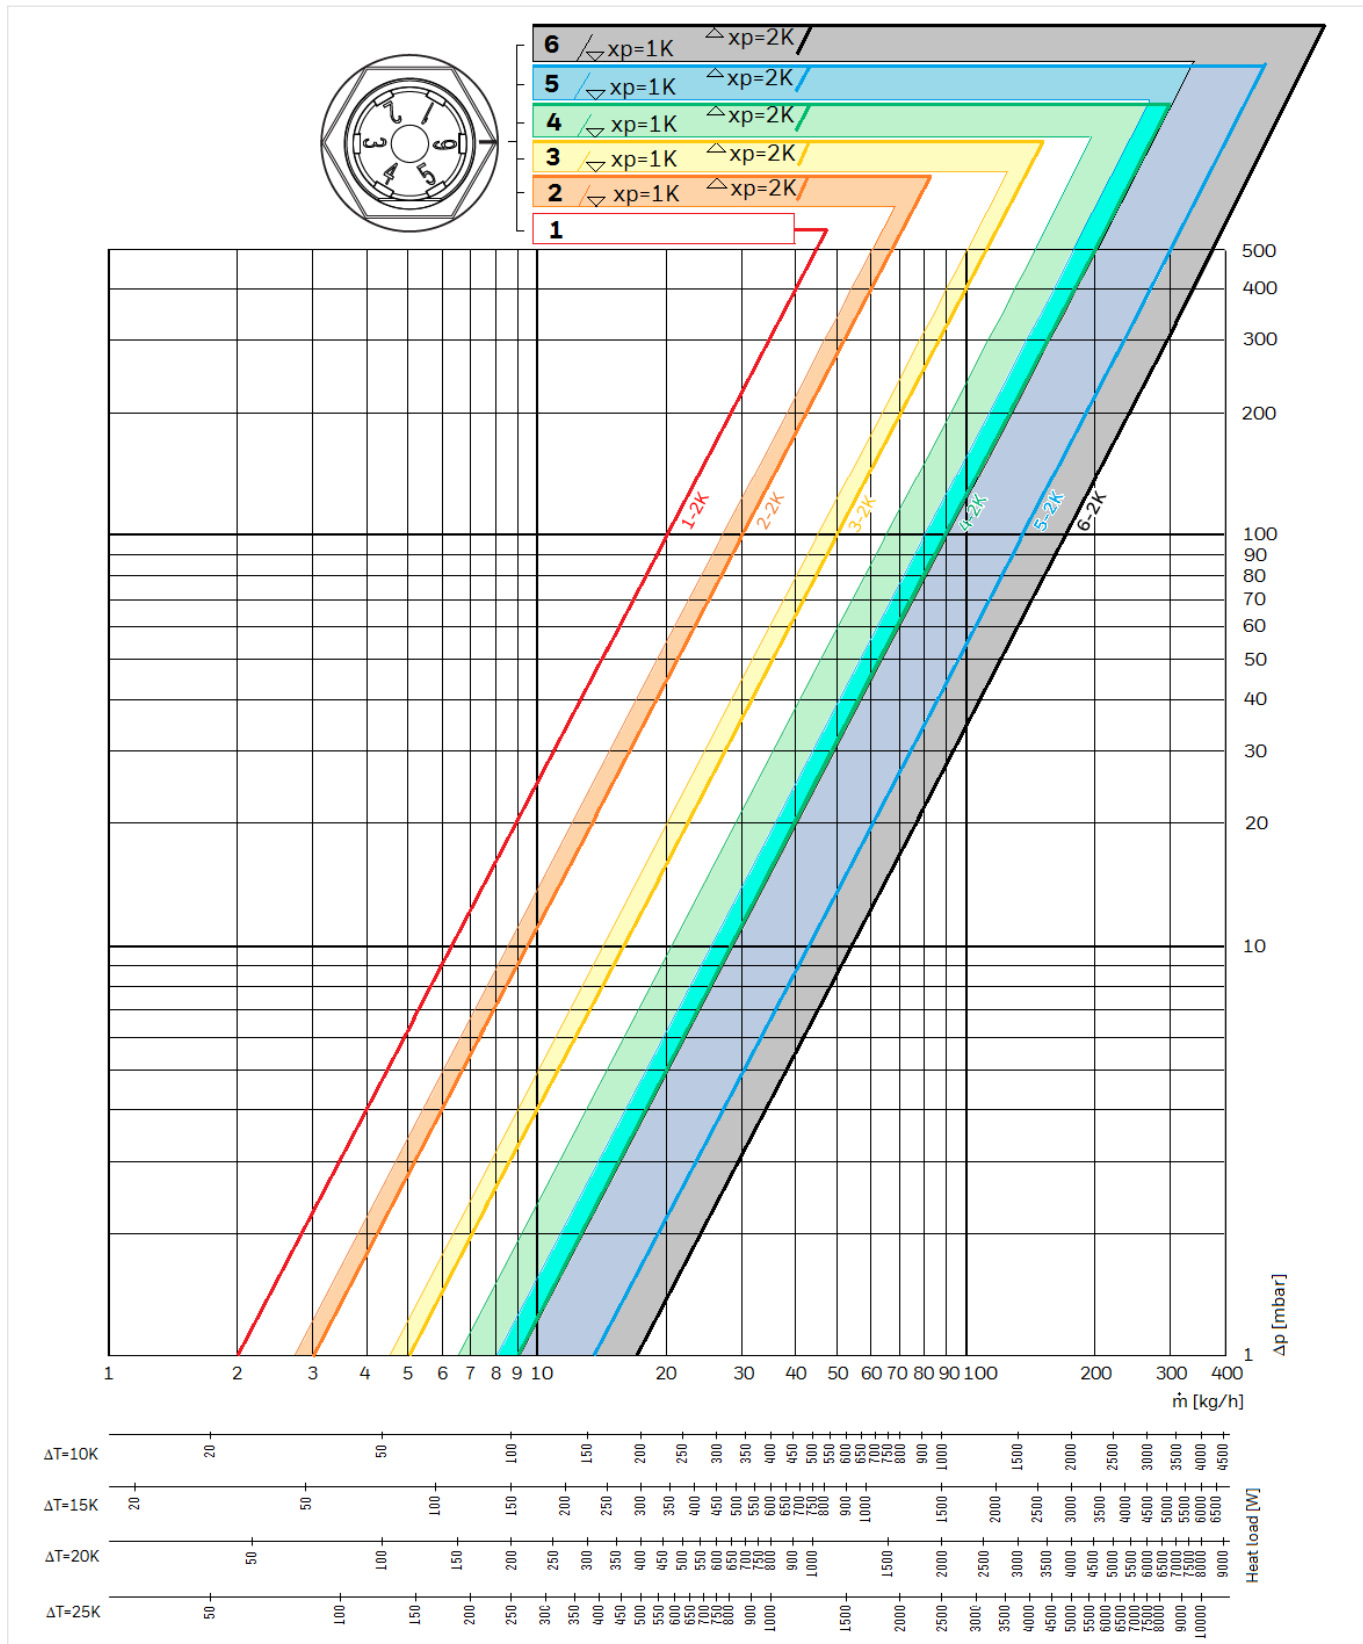

Presetting	1	2	3	4	5	6
kv-value, 1K p-band	0.063	0.085	0.14	0.21	0.25	0.28
<b>kv-value, 2K p-band</b>	<b>0.063</b>	<b>0.095</b>	<b>0.16</b>	<b>0.28</b>	<b>0.43</b>	<b>0.54</b>
kvs	0.063	0.104	0.18	0.34	0.52	0.70


**DN10 Axial, double angle (corner) valves and DN10 straight valves, with standard heads (0.22 mm/K stroke)**

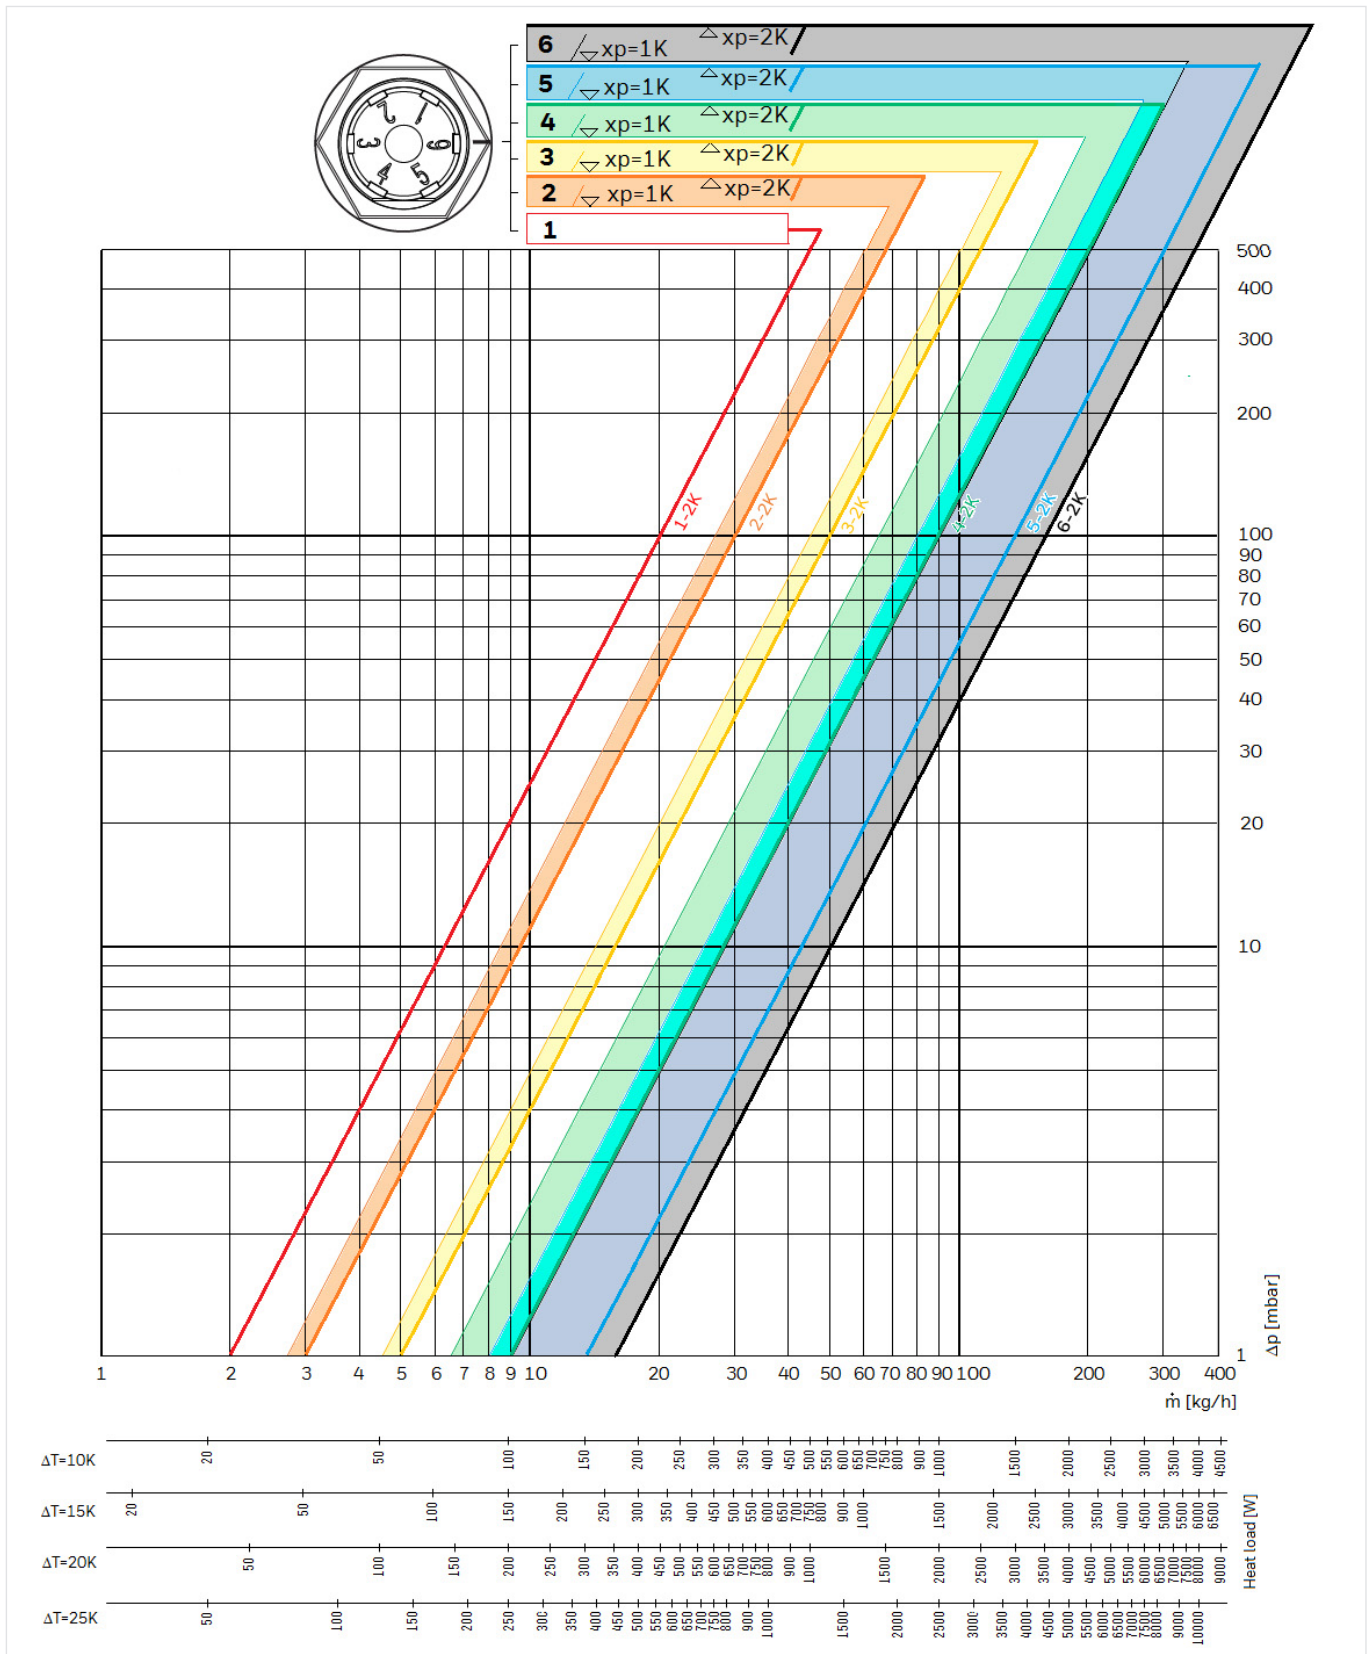

Presetting	1	2	3	4	5	6
kv-value, 1K p-band	0.063	0.085	0.14	0.21	0.25	0.28
<b>kv-value, 2K p-band</b>	<b>0.063</b>	<b>0.095</b>	<b>0.16</b>	<b>0.28</b>	<b>0.43</b>	<b>0.51</b>
kvs	0.063	0.104	0.18	0.34	0.52	0.62




All angled valves, DN15/DN20 straight and DN15 axial valves, with T3019HF or T6001HF head (0.35 mm/K stroke)

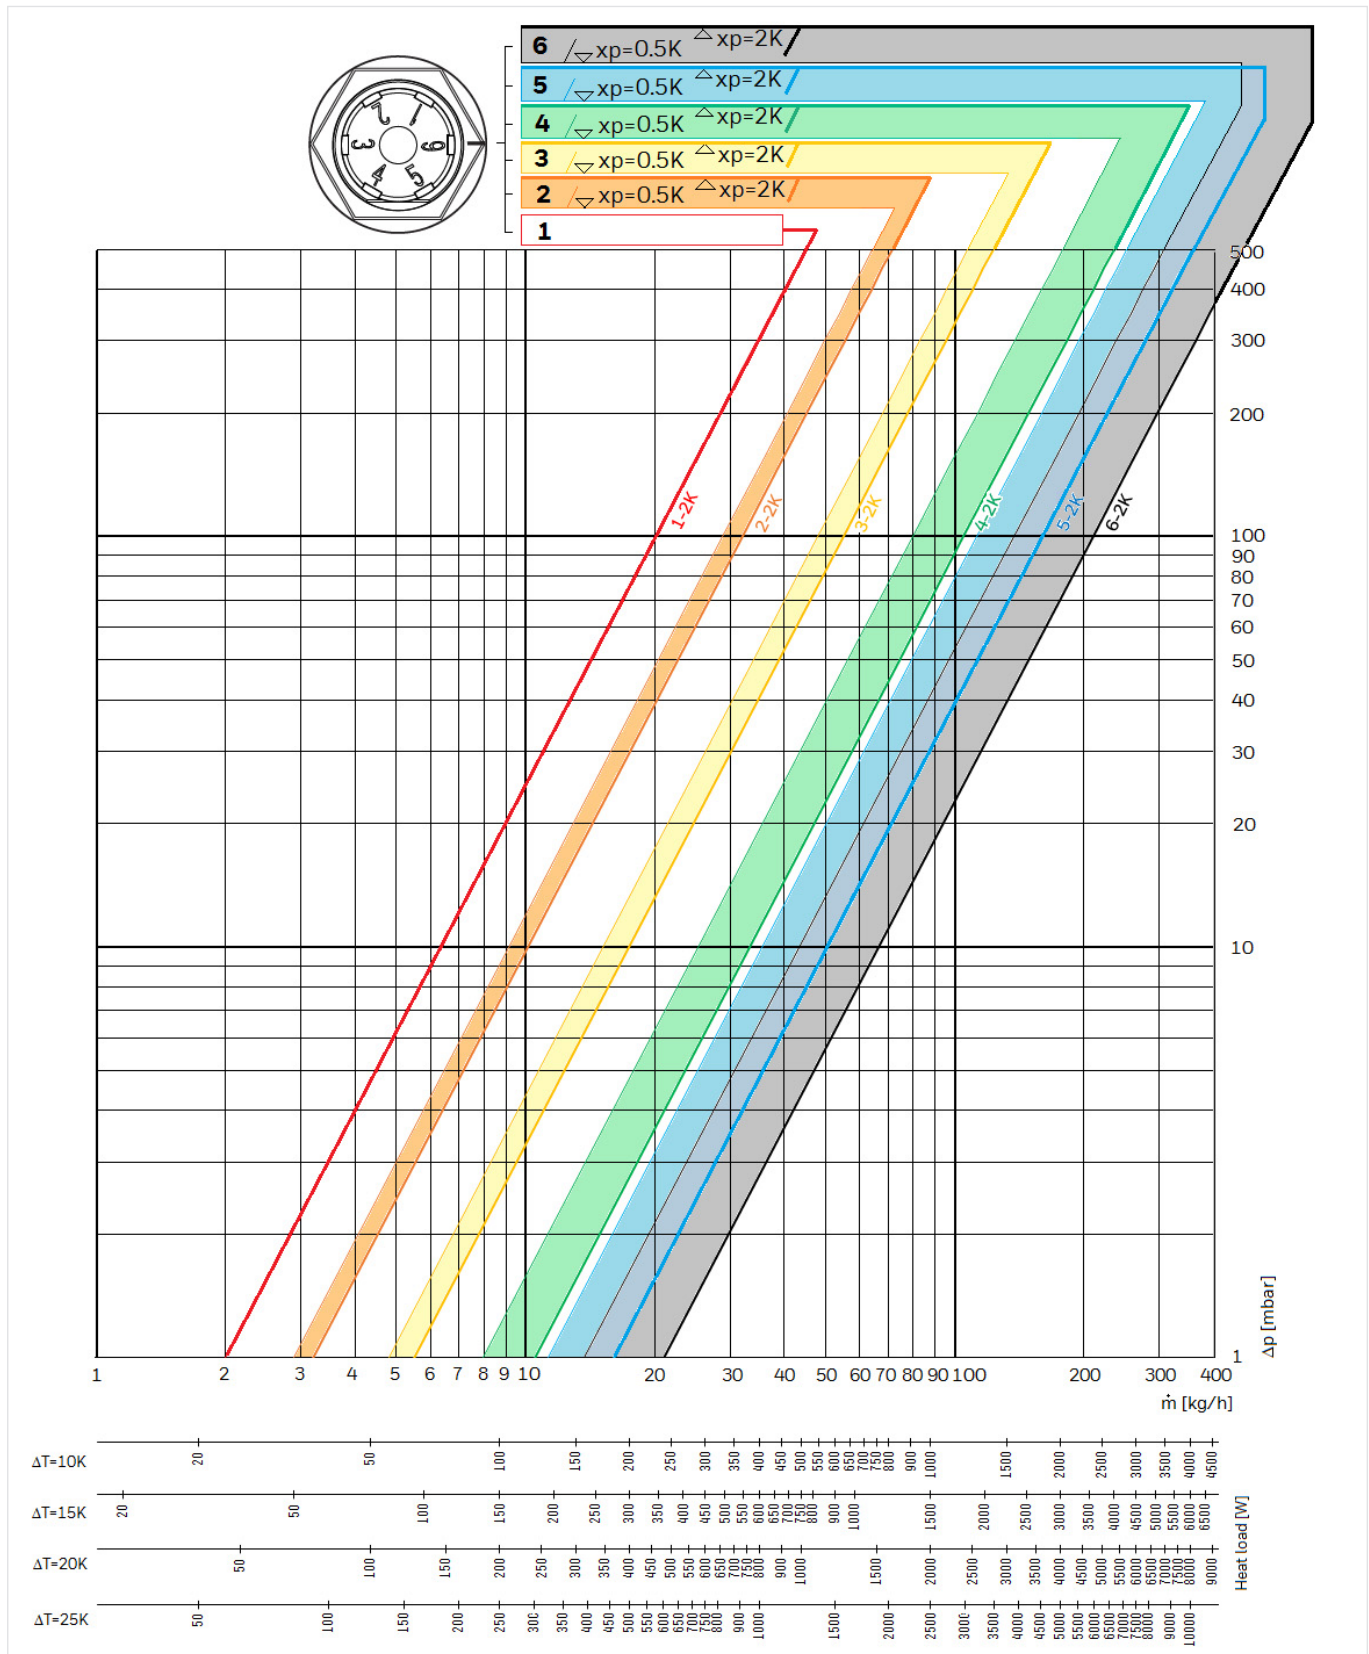

Presetting	1	2	3	4	5	6
kv-value, 0.5K p-band	0.063	0.091	0.15	0.25	0.36	0.43
kv-value, 1K p-band	0.063	0.095	0.16	0.27	0.40	0.46
<b>kv-value, 2K p-band</b>	<b>0.063</b>	<b>0.101</b>	<b>0.17</b>	<b>0.33</b>	<b>0.51</b>	<b>0.66</b>
kvs	0.063	0.104	0.18	0.34	0.52	0.62


**DN10 axial, double angle (corner) valves and DN10 straight valves, with T3019HF or T6001HF head (0.35 mm/K stroke)**

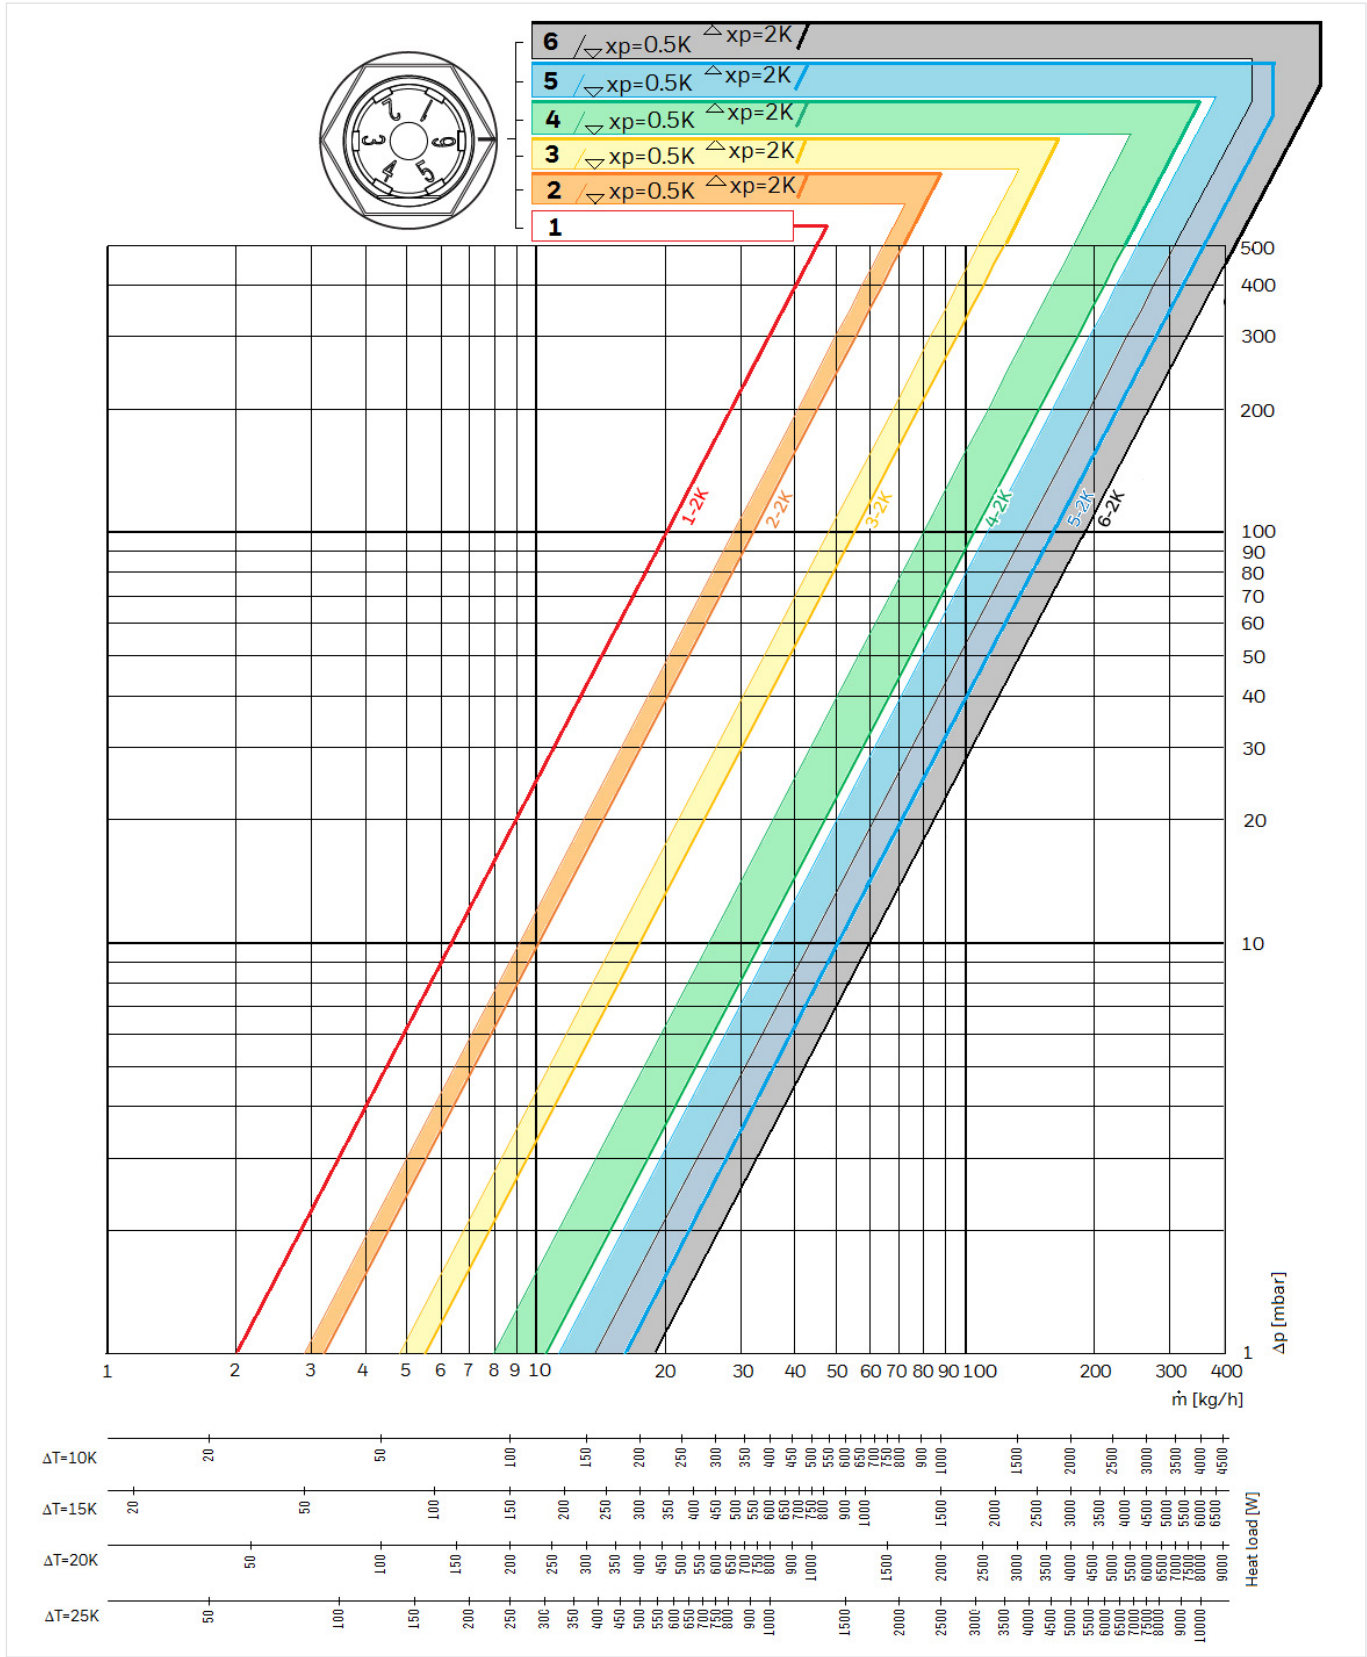

Presetting	1	2	3	4	5	6
kv-value, 0.5K p-band	0.063	0.091	0.15	0.25	0.36	0.43
kv-value, 1K p-band	0.063	0.095	0.16	0.27	0.40	0.46
<b>kv-value, 2K p-band</b>	<b>0.063</b>	<b>0.101</b>	<b>0.17</b>	<b>0.33</b>	<b>0.51</b>	<b>0.60</b>
kvs	0.063	0.104	0.18	0.34	0.52	0.62



### DIMENSIONS AND ORDERING INFORMATION

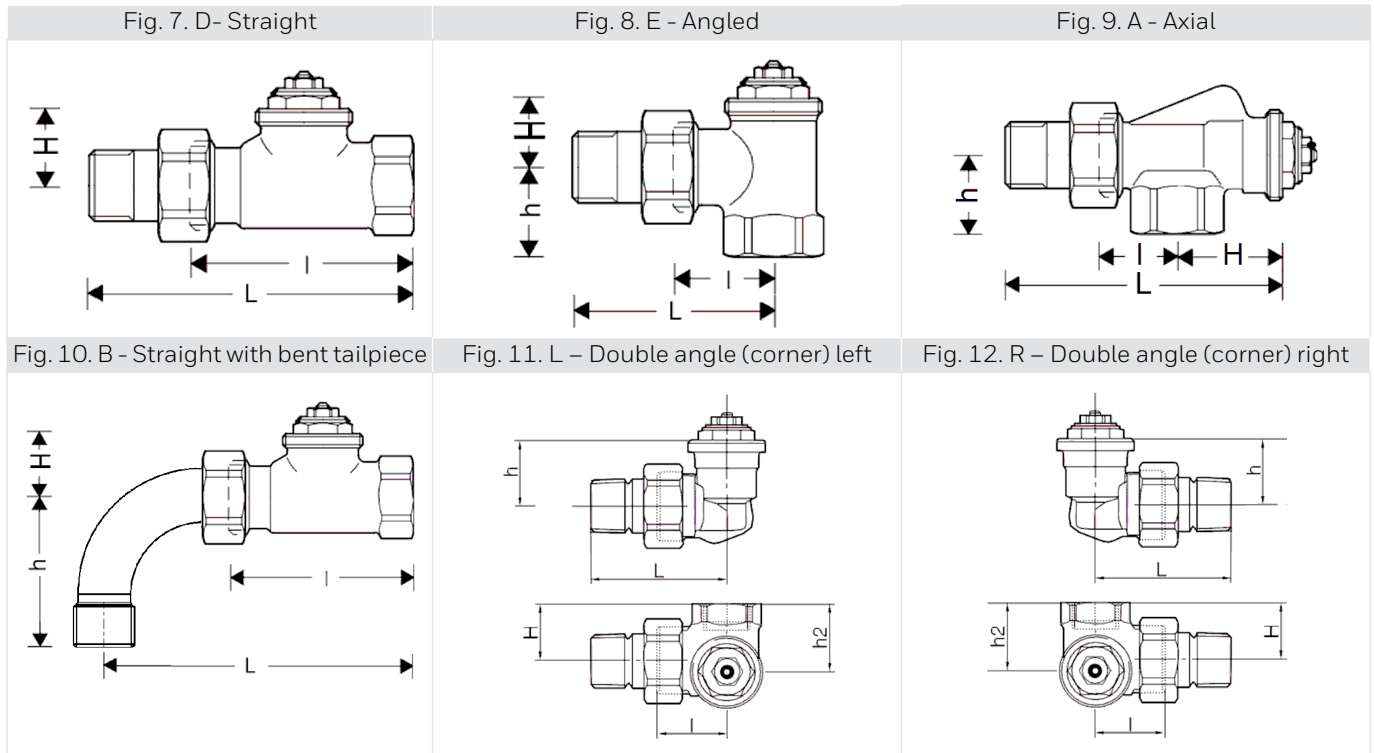

Note: All dimensions in mm unless stated otherwise.

#### Ranges

V2000/V2020	V2026	V2030	V2036
Bodies with internal threads and metal-to-metal sealing radiator tailpieces	Bodies with external threads and metal-to-metal sealing radiator tailpieces	Bodies with internal threads and soft sealing radiator tailpieces	Bodies with external threads and soft sealing radiator tailpieces
			

#### V2000/V2020: Bodies with internal threads and metal-to-metal sealing radiator tailpieces

Body type	DN	EN 215 certified	Q <sub>nom</sub> range with std. head	Pipe connection	l	L	h	H	h <sub>2</sub>	OS-No.
<b>E - Angled</b> per EN 215 <b>D</b> -Series	10	•	20-170kg/h	Rp 3/8"	26	52	22	20	-	V2000ESX10
	15	•	20-170kg/h	Rp 1/2"	29	58	26	20	-	V2000ESX15
	20	•	20-170kg/h	Rp 3/4"	34	66	29	19	-	V2000ESX20
<b>D - Straight</b> per EN215 <b>D</b> -Series	10	•	20-160kg/h	Rp 3/8"	59	85	-	25	-	V2000DSX10
	15	•	20-170kg/h	Rp 1/2"	66	95	-	25	-	V2000DSX15
	20	•	20-170kg/h	Rp 3/4"	74	106	-	25	-	V2000DSX20
<b>B - Straight</b> with <b>bent</b> tailpiece	15		20-170kg/h	Rp 1/2"	66	108	52	25	-	V2000BSX15
<b>E - Angled</b> per EN 215 <b>F</b> -Series	10	•	20-170kg/h	Rp 3/8"	24	49	20	21	-	V2020ESX10
	15	•	20-170kg/h	Rp 1/2"	26	53	23	22	-	V2020ESX15
	20	•	20-170kg/h	Rp 3/4"	34	66	29	18	-	V2020ESX20
<b>D - Straight</b> per EN 215 <b>F</b> -Series	10	•	20-160kg/h	Rp 3/8"	50	75	-	26	-	V2020DSX10
	15	•	20-170kg/h	Rp 1/2"	55	82	-	26	-	V2020DSX15
	20	•	20-170kg/h	Rp 3/4"	74	106	-	24	-	V2020DSX20
<b>A - Axial</b>	10		20-160kg/h	Rp 3/8"	24	50	22	33	-	V2000ASX10
	15		20-160kg/h	Rp 1/2"	26	54	26	35	-	V2000ASX15

Body type	DN	EN 215 certified	Q <sub>nom</sub> range with std. head	Pipe connection	l	L	h	H	h <sub>2</sub>	OS-No.
<b>L</b> – Double Angle (Corner) <b>Left</b>	10		20-160kg/h	Rp 3/8"	24	53	26	22	26.5	V2020LSX10
	15		20-160kg/h	Rp 1/2"	24	53	26	26	30.5	V2020LSX15
<b>R</b> – Double Angle (Corner) <b>Right</b>	10		20-160kg/h	Rp 3/8"	24	53	26	26	26.5	V2020RSX10
	15		20-160kg/h	Rp 1/2"	24	53	26	26	30.5	V2020RSX15

**V2026: Bodies with external threads and metal-to-metal sealing radiator tailpieces**

Body type	DN	EN 215 certified	Q <sub>nom</sub> range with std. head	Fitting connection thread	l	L	h	H	h <sub>2</sub>	OS-No.
<b>E – Angled</b> (A – Axial when flipped)	15		20-170kg/h	G 3/4"	26	53	23	22	-	V2026ESX15
<b>D – Straight</b>	15		20-160kg/h	G 3/4"	55	82	-	26	-	V2026DSX15
<b>B – Straight</b> with <b>bent</b> tailpiece	15		20-170kg/h	G 3/4"	55	97	52	26	-	V2026BSX15





**V2030: Bodies with internal threads and soft sealing radiator tailpieces**

Body type	DN	EN 215 certified	Q <sub>nom</sub> range with std. head	Pipe connection	l	L	h	H	h <sub>2</sub>	OS-No.
<b>E – Angled</b> per EN 215 <b>F</b> -Series	10	•	20-170kg/h	Rp 3/8"	24	49	20	21	-	V2030ESX10
	15	•	20-170kg/h	Rp 1/2"	26	53	23	22	-	V2030ESX15
<b>D – Straight</b> per EN215 <b>F</b> -Series	10	•	20-160kg/h	Rp 3/8"	50	75	-	26	-	V2030DSX10
	15	•	20-170kg/h	Rp 1/2"	55	82	-	26	-	V2030DSX15
<b>A – Axial</b>	10		20-160kg/h	Rp 3/8"	24	50	22	33	-	V2030ASX10
	15		20-160kg/h	Rp 1/2"	26	54	26	35	-	V2030ASX15
<b>L</b> – Double Angle (Corner) <b>Left</b>	15		20-160kg/h	Rp 1/2"	24	53	26	26	30.5	V2030LSX15
<b>R</b> – Double Angle (Corner) <b>Right</b>	15		20-160kg/h	Rp 1/2"	24	53	26	26	30.5	V2030RSX15


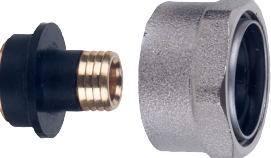
**V2036: Bodies with external threads and soft sealing radiator tailpieces**

Body type	DN	EN 215 certified	Q <sub>nom</sub> range with std. head	Fitting connection thread	l	L	h	H	h <sub>2</sub>	OS-No.
<b>E – Angled</b>	10		20-170kg/h	G 3/4"	24	49	20	21	-	V2036ESX10
<b>E – Angled</b> (A – Axial when flipped)	15		20-170kg/h	G 3/4"	26	53	23	22	-	V2036ESX15
<b>D – Straight</b>	10		20-160kg/h	G 3/4"	50	75	-	26	-	V2036DSX10
	15		20-170kg/h	G 3/4"	55	82	-	26	-	V2036DSX15
<b>L – Corner Left</b>	15		20-160kg/h	G 3/4"	24	53	26	26	30.5	V2036LSX15
<b>R – Corner Right</b>	15		20-160kg/h	G 3/4"	24	53	26	26	30.5	V2036RSX15


**ACCESSORIES**

	Description	Dimension	Part No.
	<b>VA8201</b> <b>Metallic presetting key with chrome plating</b> for PI, SX, FX and LX type valves		VA8201PI04
	<b>VA8201</b> <b>Plastic presetting key</b> for PI, SX, FX and LX type valves and Verafix lockshields		VA8201TRV01
	<b>VA8200A</b> <b>Service tool to replace valve insert</b> for all V2000 types: SX, FX, LX, BB, UB and for legacy types: Kx, SL, SLGB, Mira		VA8200A001
	<b>VA2202A</b> <b>Pressure cap – for shutting off valves on radiator outlet</b>		
	G 5/8" internal thread - for DN10 valves		VA2202A010
	G 3/4" internal thread - for DN15 valves		VA2202A015
G 1" internal thread - for DN20 valves		VA2202A020	

	<b>VA5090</b>	<b>Sealing ring for pressure cap</b>		
		for VA2202A010	VA5090A010	
		for VA2202A015	VA5090A015	
		for VA2202A020	VA5090A020	
	<b>VA5201A</b>	<b>Radiator tailpiece with thread up to collar</b>		
		3/8", DN10	VA5201A010	
		1/2", DN15	VA5201A015	
		3/4", DN20	VA5201A020	
	<b>VA5204B</b>	<b>Extended radiator tailpiece, nickel-plated, to be shortened as required</b>		
		3/8" x 70 mm (for DN10) thread approx. 50 mm	VA5204B010	
		1/2" x 76 mm (for DN15) thread approx. 65 mm	VA5204B015	
		3/4" x 70 mm (for DN20) thread approx. 60 mm	VA5204B020	
	<b>VA6290</b>	<b>Reduction piece</b>		
		1" pipe > 1/2" valve	VA6290A260	
		1 1/4" pipe > 1/2" valve	VA6290A280	
		1" pipe > 3/4" valve	VA6290A285	
		1 1/4" pipe > 3/4" valve	VA6290A305	
	<b>FIG1/2CS</b>	<b>Compression fitting for COPPER and STEEL pipe</b>		
		Consisting of compression nut and compression ring. For valves with internal thread.		
		3/8", DN10	10 mm	FIG3/8CS10
		3/8", DN10	12 mm	FIG3/8CS12
		1/2", DN15	10 mm	FIG1/2CS10
		1/2", DN15	12 mm	FIG1/2CS12
		1/2", DN15	14 mm	FIG1/2CS14
		1/2", DN15	15 mm	FIG1/2CS15
		1/2", DN15	16 mm	FIG1/2CS16
		3/4", DN20	18 mm	FIG3/4CS18
		22 mm	FIG3/4CS22	
	<b>FIG1/2CSS</b>	<b>Compression fitting for COPPER and STEEL pipe</b>		
		Consisting of compression nut and compression ring and support insert. For valves with internal thread.		
		Note: Support inserts have to be used for copper or soft steel pipe with 1.0 mm wall thickness.		
		3/8", DN10	12 mm	FIG3/8CSS12
		1/2", DN15	12 mm	FIG1/2CSS12
		1/2", DN15	14 mm	FIG1/2CSS14
		1/2", DN15	15 mm	FIG1/2CSS15
		1/2", DN15	16 mm	FIG1/2CSS16
	1/2", DN15	18 mm	FIG1/2CSS18	
	3/4", DN20	18 mm	FIG3/4CSS18	
	<b>FIG1/2M</b>	<b>Compression fitting for MULTILAYER pipe</b>		
		Consisting of compression nut, compression ring and support insert. For valves with internal thread.		
	1/2", DN15	16 mm	FIG1/2M16X2	
	<b>FEG3/4CS</b>	<b>Compressions fitting for copper and precision steel pipes</b>		
		One-piece fitting with steel reinforced elastic ring. For valves with external thread.		
		3/4" Euroconus	10 mm	FEG3/4CS10
		3/4" Euroconus	12 mm	FEG3/4CS12
		3/4" Euroconus	14 mm	FEG3/4CS14
		3/4" Euroconus	15 mm	FEG3/4CS15
		3/4" Euroconus	16 mm	FEG3/4CS16
	3/4" Euroconus	18 mm	FEG3/4CS18	

	<b>FEG3/4P</b>	<b>Compression fitting for PEX/PER pipe</b>		
		Consisting of 2 union nuts, 2 compression rings and 2 support inserts. For valves with external thread.		
	$\frac{3}{4}$ " Euroconus	12 x 1.1 mm	FEG3/4P12X1.1	
	$\frac{3}{4}$ " Euroconus	16 x 1.5 mm	FEG3/4P16X1.5	
	<b>FEG3/4PM</b>	<b>Compression fitting for PEX and MULTILAYER pipe</b>		
		Consisting of a nut with pre-assembled anti-torsion compression ring and a reinforcing insert. For valves with external thread.		
	$\frac{3}{4}$ " Euroconus	14x2 mm	FEG3/4PM14X2	
	$\frac{3}{4}$ " Euroconus	16x2 mm	FEG3/4PM16X2	
	$\frac{3}{4}$ " Euroconus	16x2.2 mm	FEG3/4PM16X2.2	
	$\frac{3}{4}$ " Euroconus	17x2 mm	FEG3/4PM17X2	
	$\frac{3}{4}$ " Euroconus	18x2 mm	FEG3/4PM18X2	
$\frac{3}{4}$ " Euroconus	20x2 mm	FEG3/4PM20X2		

## SPARE PARTS

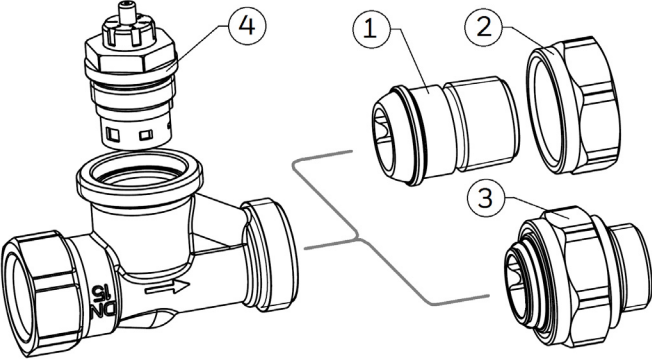Overview	Description	Dimension	Part No.
	<b>1 Metal-to-metal sealing radiator tailpiece</b>		
		$\frac{3}{8}$ ", DN10	VA5200B010
		$\frac{1}{2}$ ", DN15	VA5200B015
		$\frac{3}{4}$ ", DN20	VA5200B020
	<b>2 Coupling nut, nickel plated</b>		
		DN10, nut with G $\frac{5}{8}$ " internal thread	VA5000B010
		DN15, nut with G $\frac{3}{4}$ " internal thread	VA5000B015
		DN20, nut with G 1" internal thread	VA5000B020
	<b>3 Soft sealing radiator tailpiece with nut</b>		
		$\frac{3}{8}$ ", DN10, nut with G $\frac{5}{8}$ " internal thread	VA5536A010
		$\frac{1}{2}$ ", DN15, nut with G $\frac{3}{4}$ " internal thread	VA5536A015
	<b>4 Replacement valve insert</b>		
		SX type	VS1200SX01

### For more information

[homecomfort.resideo.com/europe](http://homecomfort.resideo.com/europe)



Ademco 1 GmbH  
Hardhofweg 40  
74821 MOSBACH  
GERMANY

Phone: +49 6261 810  
Fax: +49 6261 81309

Manufactured for and on behalf of the  
Pittway Sàrl, La Pièce 4, 1180 Rolle, Switzerland  
by its Authorised Representative Ademco 1 GmbH  
EN0H-2112GE23 R0521

Subject to change

© 2021 Pittway Sàrl. All rights reserved.

This document contains proprietary information of Pittway Sàrl and its affiliated companies and is protected by copyright and other international laws. Reproduction or improper use without specific written authorisation of Pittway Sàrl is strictly forbidden. The Honeywell Home trademark is used under license from Honeywell International Inc.



Strandvejen 42 • Saksild • 8300 Odder  
86 62 63 64 • [www.automatikcentret.dk](http://www.automatikcentret.dk)  
[info@automatikcentret.dk](mailto:info@automatikcentret.dk)

**Honeywell Home**